





FICHA TECNICA DE PRODUCTO / TECHNICAL PRODUCT DATA SHEET

DENOMINACION DE ARTICULO / ARTICLE DESCRIPTION: FLEXLAYER SK d 7x11mm N°2-PITON

CODIGO DE ARTICULO / ARTICLE CODE: 305021

TUBING FOOD S.L. FLEXLAYER 7 x 11mm SK N° + LOTE

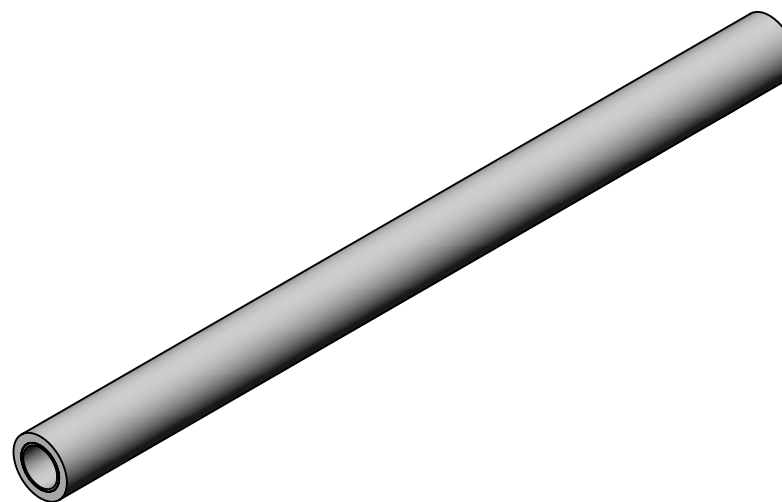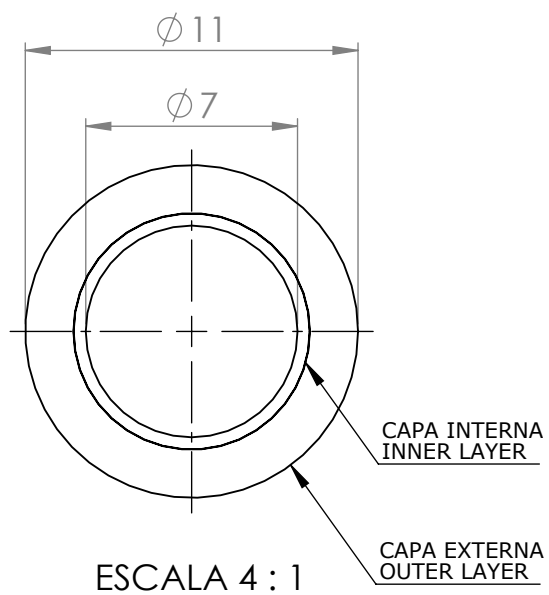

	LISTA DE MATERIALES	LIST OF MATERIALS
CAPA INTERNA INNER LAYER	POLIOLEFINA Espesor: 0,2/0,4mm	POLYOLEFIN Thickness: 0,2/0,4mm
CAPA EXTERNA OUTER LAYER	POLIETILENO DE BAJA DENSIDAD COLOR NATURAL	LOW DENSITY POLIETHYLENE NATURAL COLOUR

FICHA TECNICA DE PRODUCTO / TECHNICAL PRODUCT DATA SHEET

DENOMINACION DE ARTICULO / ARTICLE DESCRIPTION: FLEXLAYER SK d 7x11mm Nº2-PITON

CODIGO DE ARTICULO / ARTICLE CODE: 305021

ESPECIFICACIONES TECNICAS DE PRODUCTO	TECHNICAL PRODUCT SPECIFICATIONS
La materia prima utilizada en la fabricación de este artículo es 100% virgen, compuesta de materiales y aditivos que están incluidos en la lista de sustancias autorizadas por el Reglamento (UE) Nº 10/2011 de la Comisión Europea relativo a materiales y objetos plásticos destinados a entrar en contacto con alimentos 	The raw material used in the manufacture of this article is 100% virgin, composed of materials and additives that are included in the list of substances authorized by Regulation (EU) Nº 10/2011 of the European Commission relating to plastic materials and articles intended to come into contact with food 
Diámetro interno nominal: 7 mm	Nominal internal diameter: 7 mm
Diámetro externo nominal: 11 mm	Nominal external diameter: 11 mm
Espesor de pared Nominal: 2 mm	Nominal Wall thickness: 2 mm
Tolerancias de diámetro interior: +/- 0,1 mm	Internal Diameter tolerantes: +/- 0,1 mm
Presión de trabajo: 13,5 bar	Safe working pressure: 13,5 bar
Presión de rotura: 40,6 bar	Burst pressure: 40,6 bar
Longitud del rollo: 210 metros	Length of coil: 210 meters
Embalaje del rollo: Envuelto con film transparente	Coil packaging: Wrapped with transparent film
- Certificaciones del producto acabado: - Reglamento Europeo (CE) Nº 1935/2004 - Alemana SK-ZERT	- Finished product certifications: - European Regulation (CE) Nº 1935/2004 - Germany SK-ZERT
Compatible con conectores rápidos	Quick fittings compatible